


LIFTING FROM THE FOUR TOP/BOTTOM CORNER FITTINGS


MAXIMUM GROSS WEIGHT  
0 kg 15'000

INTERNAL LOAD (2R - T)  
0 kg 21'000

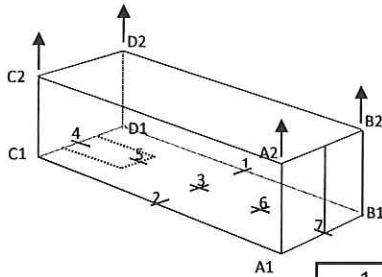

LIFTING FROM THE FOUR TOP CORNER FITTINGS

	1	2	3	4	5	6	7
EMPTY	21,5	41,7	/	63,8	/	/	57,2
DEFLECTIONS MEASURED BEFORE LIFTING (ON PADS)	21,8	42,2	/	63,8	/	/	57,2
DEFLECTIONS MEASURED DURING LIFTING	21,9	42,3	/	63,8	/	/	57,2
DEFLECTIONS MEASURED AFTER LIFTING (ON PADS)	21,8	42,2	/	63,8	/	/	57,2
PERMANENT DEFLECTION (CONTAINER UNLOADED)	21,5	41,6	/	63,8	/	/	57,2

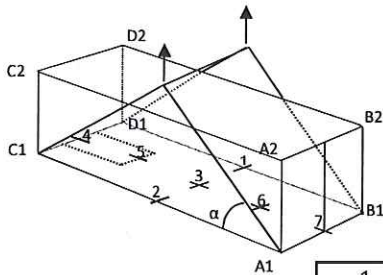

RESULT

PUNTO 1/4/7 = 0 mm  
PUNTO 2 = 1mm.

LIFTING FROM THE FOUR BOTTOM CORNER FITTINGS

$\alpha$	40'	30'	20'	10'
	30°	37°	45°	60°

	1	2	3	4	5	6	7
EMPTY							
DEFLECTIONS MEASURED BEFORE LIFTING (ON PADS)							
DEFLECTIONS MEASURED DURING LIFTING							
DEFLECTIONS MEASURED AFTER LIFTING (ON PADS)							
PERMANENT DEFLECTION (CONTAINER UNLOADED)							

RESULT